Assembly instructions

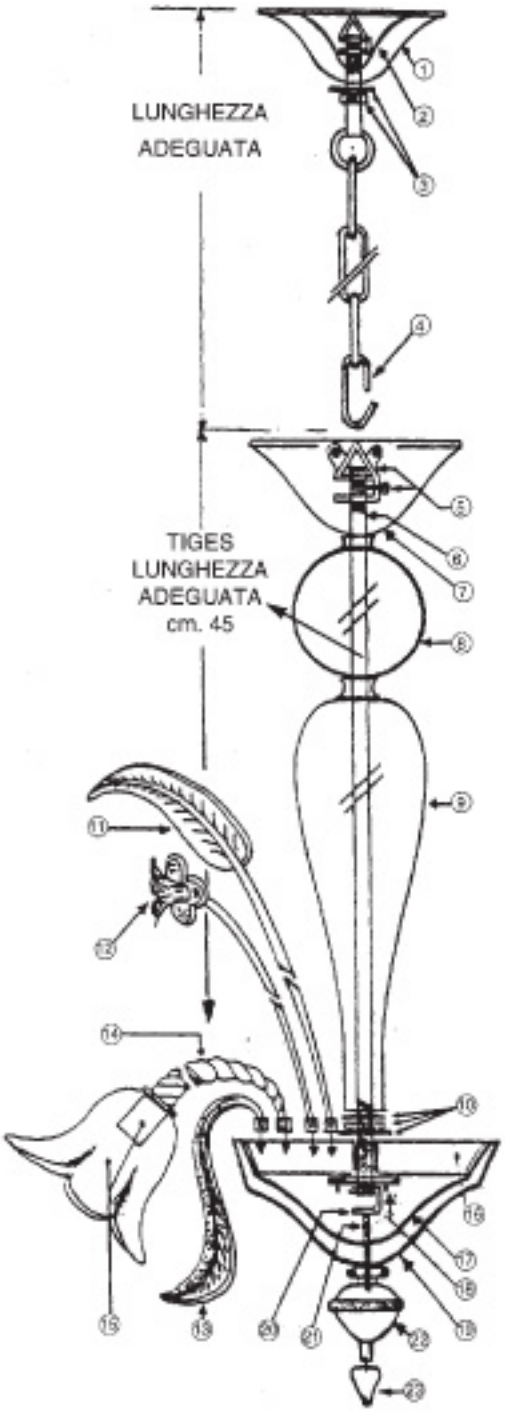

General instructions to assembly the metals components and the glassware of the chandelier:

① Glass canopy
② Metal canopy to hide the wires, only available if the glass canopy is transparent.
③ Ring-brake with pressure screw and ring, to allow the glass canopy to smoothly adhere to the ceiling.
④ Chain (length can vary), the last ring must be hooked to ⑤ and closed with pliers.
⑤ Ring by wich the chandelier hangs straight with screw where must be insert the grounding.
⑥ Tiges (variable length) threaded top and bottom.
⑦ Glass bowl.
⑧ Glass sphere.
⑨ Glass body part.
⑩ 2 plastic washers and 1 knurled metal washer to fix the metal plate ⑯
⑪ Upward glass leaves with rings at the bottom end to allow the glass to hang straight from the metal plate ⑩

⑫ Flowers (same as ⑪).
⑬ Downward leaves (same as ⑪).
⑭ Arm (same as ⑪).

⑮ Glass shade in which must be insert the socket. To avoid breakages we store the socket into another box.

⑯ Metal plate with hole where must be insert the arms, the downward and upward leaves and flowers.
⑰ Aluminium cover for the metal plate.
⑱ Washer to block the metal plate.

⑲ Glass bottom bowl.
⑳ Joint that allows the wires to pass through.
㉑ Threaded joint to fix the finial and the bottom bowl.
㉒ Glass ball.
㉓ Glass finial.

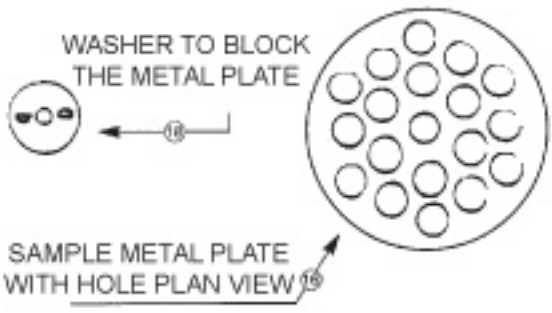

Please, in case of spare-pars request use the terminology indicated on the instruction sheet.

WARNING !

Safety of this device is garanteed only if the instructions below are accurately carried out both during installation and operation. Therefore, it is mandatory to keep them for future used installation, and every time the lamp must be touched or removed, make sure the power supply has been disconnected.
For correct operation, it is necessary that this device should be connected to an effctive gounding system.

WWW.MURANOGLASSLIGHTING.COM